

ECO MINI



Sharing the Warmth™

ECO MINI 1
ECO MINI 2.5
ECO MINI 4
ECO MINI 6



Intertek



Intertek

Electric Mini-Tank

Good things do come in small packages. The EcoSmart Mini-Tank series delivers hot water right where you need it, from your garage or outdoor kitchen to your recreational vehicle, this little problem-solver literally brings the warmth wherever you go. The 1.5–6 gallon models also come with a 15-amp plug allowing you to plug them into a 120 volt outlet.

No one wants to waste water waiting for hot water, especially on a cold day in the bathroom or the kitchen. Now the EcoSmart Mini-Tank can easily be installed to solve that problem. Save water by eliminating the wait for hot water to reach the faucet. Simply tap into the water line and install the heater directly at the sink. No need for costly recirculating lines and pumps. And when you want to eliminate the wait for hot water but need more volume, install the heater in-line with a larger hot water source, such as a tankless heater or a storage tank heater. Lightweight and compact, this unit plugs into a standard 110 volt outlet.



ecosmart®
TANKLESS WATER HEATERS

ecosmartus.com



endless
hot water



save
space



save
energy



save
time




save
money

ECO MINI

RECOVERY TIME (*see below)

Table shows recovery time based on 60°F temperature rise. The EcoSmart Mini-Tank units are significantly smaller than a typical storage tank so they are able to reheat incoming water quickly and recover faster than large tank water heaters.

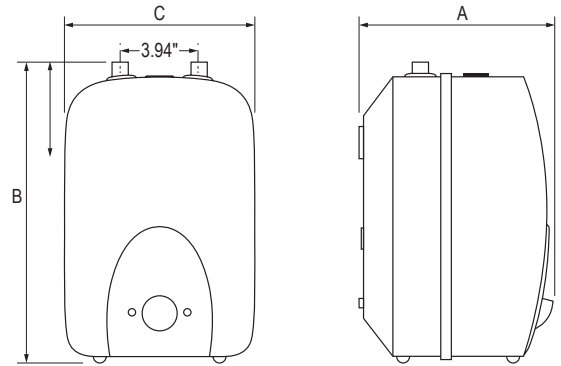


SPECIFICATIONS

| Model # | ECO MINI 1 | ECO MINI 2.5 | ECO MINI 4 | ECO MINI 6 |
|------------------------|-------------------------------------|-------------------------|--------------------------|--------------------------|
| Gallons | 1.6 | 2.6 | 3.8 | 6.1 |
| kW | 1.44 | 1.44 | 1.44 | 1.44 |
| Voltage | 120 | 120 | 120 | 120 |
| AMP | 12 | 12 | 12 | 12 |
| Fittings | 1/2" NPT at top of unit | 1/2" NPT at top of unit | 1/2" NPT at top of unit | 3/4" NPT at top of unit |
| Dimensions (A x B x C) | 9.63" x 15.39" x 9.71" | 10.94" x 17" x 10.91" | 12.65" x 18.24" x 12.28" | 14.19" x 20.83" x 13.86" |
| Weight | 13.9 lb | 17.6 lb | 21 lb | 27.1 lb |
| * Recovery Time | 8 minutes | 15 minutes | 24 minutes | 37 minutes |
| Warranty | 6 years limited leaks/2 years parts | | | |


* Recovery time based on 60°F temperature rise.

EXAMPLE HEATING APPLICATIONS


Standalone point-of-use

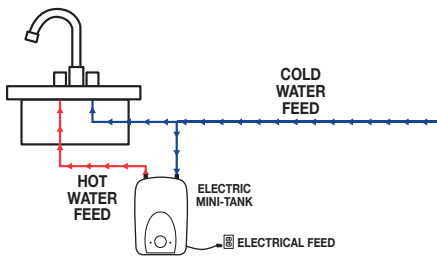


Standalone point-of-use multifixture

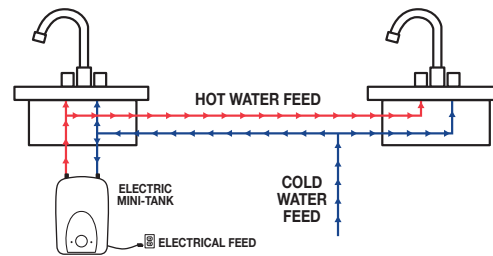

Standalone booster from central tank heating system

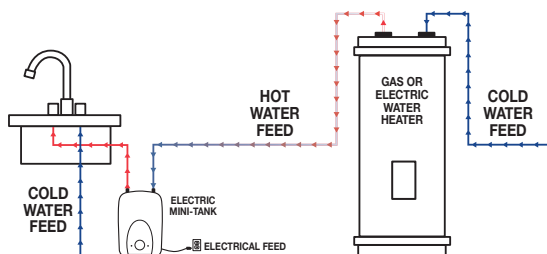

Cure for the "cold water sandwich" gas tankless

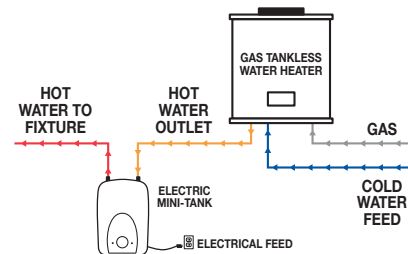

"EcoSmart" is member of the Eemax, Inc. family of brands. © 2019 Eemax, Inc. All rights reserved.

ecosmartus.com

Sharing the Warmth



ecosmart®
TANKLESS WATER HEATERS

EcoSmart, 400 Captain Neville Dr, Waterbury, CT 06705 USA

877-474-6473 | support@ecosmartus.com